

YILDIZSU-60

265/270/275/280/285P

POLYCRYSTALLINE SILICON SOLAR MODULES



Ofis

T : + 90 414 314 00 35 • + 90 414 314 39 49

F : + 90 414 314 01 18

Kamberiye Mah. Harran Üniversitesi Cad. No : 18

ŞANLIURFA / TURKEY

Fabrika

T : + 90 414 369 15 15 • F : + 90 414 369 15 14

1. Organize Sanayi Bölgesi 3. cad. No : 20

ŞANLIURFA / TURKEY

info@yildizsu.com.tr • export@yildizsu.com.tr



NUR DALGIÇ
VE ELEKTRİK MOTORLARI SAN.VE TİC.LTD.ŞTİ.



www.yildizsu.com.tr

YILDIZSU-60

265/270/275/280/285P



All-Purpose Module

YILDIZSU- 60 is a robust solar module with 60 solar cells. These modules can be used for on-grid solar applications. Our meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities guarantee YILDIZSU modules meet the highest quality standards possible.

Polycrystalline Silicon Solar Modules

Features



High module conversion efficiency (up to 18.80%), through superior manufacturing technology



Guaranteed 0- +5W positive power output tolerance ensures high reliability



Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust



Excellent performance under low light environments (mornings, evenings and cloudy days)



Entire module certified to withstand high wind loads (2400 Pascal) and snow loads (5400 Pascal)*




All-purpose Module

Sales network covers more than 20 countries, providing customers with instant after sales service and an efficient supply-chain, our clients can be found throughout the world, such as Europe, Oceania, Eastern Europe, East Asia, Middle East and Africa etc. YILDIZSU team works closely with our customers to provide them with solutions for all their solar needs.



YILDIZSU reputation is founded on more than 200MW of high performance solar modules installed around the world.

Industry-leading warranty

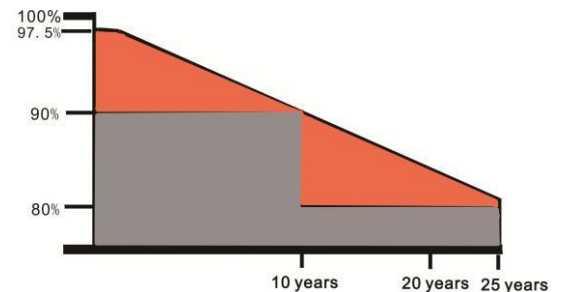

- 25 year transferable power output warranty: 10year/90%; 25year/80%.
- Based on nominal power.
- 10 year material and workmanship warranty.

YILDIZSU-60

265/270/275/280/285P

Electrical Data


STC	YIL-265-60	YIL-270-60	YIL-275-60	YIL-280-60	YIL-285-60
Nominal Maximum	265W	270W	275W	280W	285W
Optimum Operating	30.8V	31.0V	31.2V	31.2V	31.3V
Optimum Operating	8.60A	8.71A	8.81A	8.97A	9.10A
Open CIRCUIT voltage(Voc)	37.5V	37.7V	37.8V	37.8V	37.8V
Short Circuit Current(Isc)	9.08A	9.43A	9.43A	9.50A	9.53A
Module Efficiency	18.20%	18.60%	18.80%	19.00%	19.20%
Operating Temperature	-40°C~+85°C				
Maximum System Voltage	1000V(IEC)/600V(UL)				
Maximum Series Fuse Rating	15A				
Application Classification	Class A				
Power Tolerance	0 ~ + 5W				

Under Standard Test Conditions (STC) of irradiance of 1000W/m², spectrum AM 1.5 and cell temperature of 25°C

NOCT	YIL-265-60	YIL-270-60	YIL-275-60	YIL-280-60	YIL-285-60
Nominal Maximum Power (Pmax)	198W	202W	205W	208W	211W
Optimum Operating Voltage (Vmp)	30.0V	30.2V	30.4V	30.4V	30.5V
Optimum Operating Current (Imp)	6.60A	6.69A	6.74A	6.84A	6.92A
Open Circuit Voltage (Voc)	34.7V	34.9V	35.1V	35.1V	35.3V
Short Circuit Current (Isc)	7.15A	7.20A	7.24A	7.30A	7.38A

Under Normal Operating Cell Temperature, irradiance of 800 W/m²,spectrum AM 1.5,ambient temperature 20°C wind speed 1m/s

IV-Curves


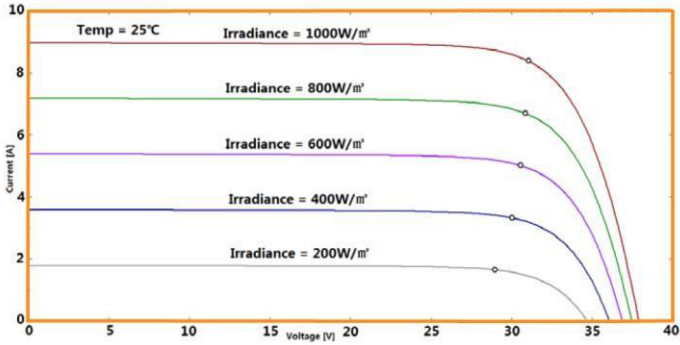


Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.43%/°C
Temperature Coefficient of Voc	-0.34%/°C
Temperature Coefficient of Isc	0.065%/°C

Packing Configuration

Container	20'GP	40'HQ
Pieces	300	832

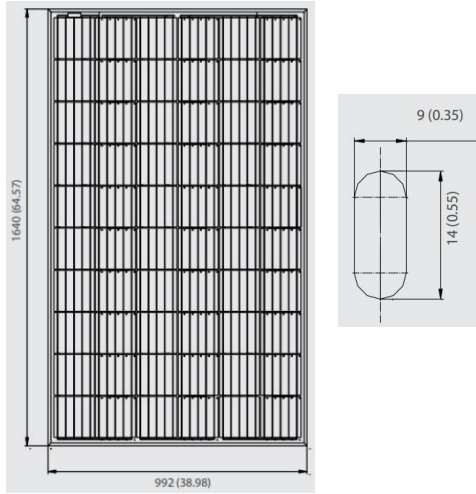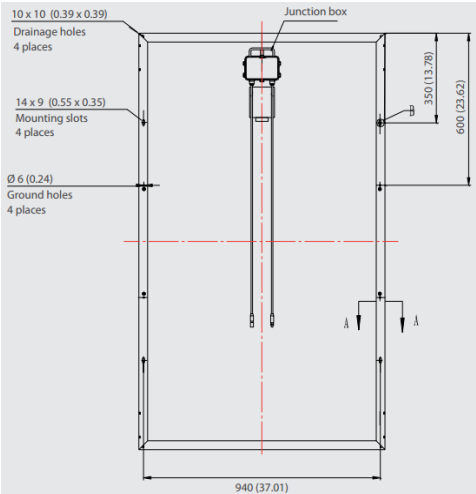

Mechanical Data

Cell Type	Poly-crystalline 156.75x156.75mm, 4 or 5BB
Cell Arrangement	60 (6x10)
Dimensions	1640 x 990 x 35mm (64.57 x 38.98 x 1.38in)
Weight	19kg
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP67, 6 Diodes
Cable	4mm2(IEC)/12AWG(UL),900mm
Connectors	MC4 or MC4 Comparable
Standard Packaging (Modules per Pallet)	30pcs
Module Pieces per container (40HQ)	832pcs (40'HQ)